

shadowclad®



# SHADOWCLAD® FLASHINGS RANGE

Available from 1<sup>st</sup> October 2016

Aluminium		Shadowclad Flashings Range		
Flashing	Line Drawing	Description	Finish Available	Length (mm)
<p><b>NEW 'T' FLASHING</b></p> <p>'T' Flashing</p>		'T' flashing for mixed cladding junctions	Natural Anodised or Mill	3000 or 6000
<p>Internal 90° Angle</p>		Back flashing for internal corners	Natural Anodised	3000 or 6000
<p>Internal 'W' Angle</p>		'W' back flashing for internal corners providing a flush finish with panels (13mm x 13mm)	Natural Anodised or Mill	3000 or 6000

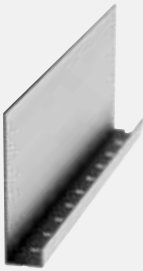

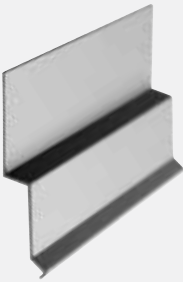
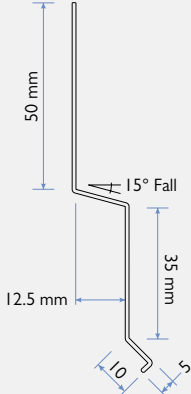
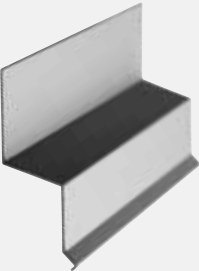
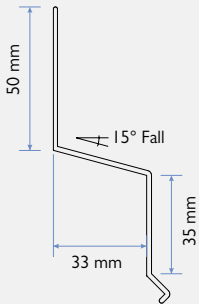
Aluminium

Shadowclad Flashings Range

Flashing	Line Drawing	Description	Finish Available	Length (mm)
Large Internal 'W' Angle		'W' back flashing for internal corners (25mm x 25mm) <b>Design Tip:</b> Use a Large 'W' where a flush junction between the Horizontal 'Z' flashing and corner flashing is desired	Natural Anodised or Mill	3000 or 6000
External Box Angle		Box corner for external corners providing a flush finish with panels	Natural Anodised or Mill	3000 or 6000
Large External Box Angle		Box corner for external corners (25mm x 25mm) <b>Design Tip:</b> Use Large External Box where a flush junction between the Horizontal 'Z' flashing and corner flashing is desired	Natural Anodised or Mill	3000 or 6000
Vertical Top Hat		Vertical sheet joint flashing	Natural Anodised or Mill	3000 or 6000

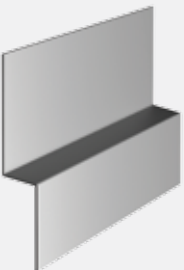
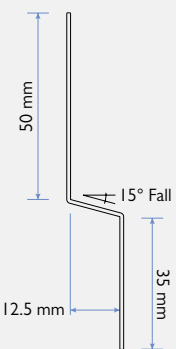


Aluminium

Shadowclad Flashings Range

Flashing	Line Drawing	Description	Finish Available	Length (mm)
Cavity Base Closure	 	Restricts vermin from accessing the cavity space	Natural Anodised	3600
Horizontal 'Z'	 	Horizontal 'Z' flashing for horizontal joints between panels	Natural Anodised or Mill	3600
Inter-Storey 'Z'	 	Horizontal 'Z' flashing for horizontal joints between panels when limiting continuous cavities to a height of two storeys or 7 metres	Natural Anodised or Mill	3600


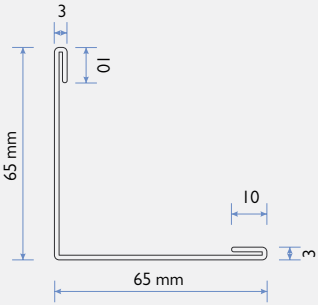
**Aluminium**

**Shadowclad Flashings Range**

Flashing	Line Drawing	Description	Finish Available	Length (mm)
Horizontal 'Z' Back	 	Back flashing for junction of butt jointed horizontal 'Z' flashing	Mill	300
Inter-storey 'Z' Back	 	Back flashing for junction of butt joint 'Z' Flashing inter-storey	Mill	300


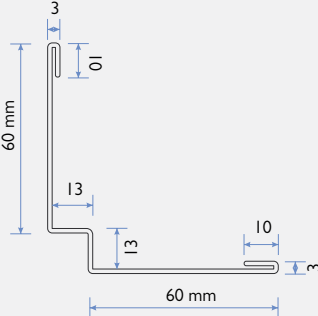

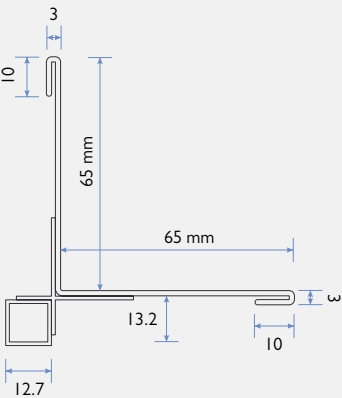
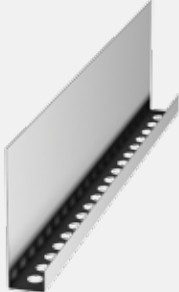
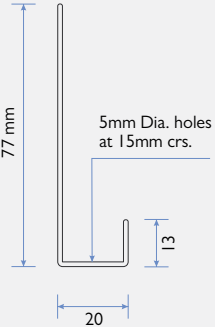
**Stainless Steel**

**Shadowclad Flashings Range**

Flashing	Line Drawing	Description	Finish Available	Length (mm)
Internal 90° Angle	 	Back flashing for internal corners	Stainless Steel	3000

Stainless Steel

Shadowclad Flashings Range

Flashing	Line Drawing	Description	Finish Available	Length (mm)
Internal 'W' Angle	 	'W' back flashing for internal corners providing a flush finish with panels (13mm x 13mm)	Stainless Steel	3000
External Box Angle	 	Box corner for external corners providing a flush finish with panels	Stainless Steel	3000
Cavity Base Closure	 	Restricts vermin from accessing the cavity space	Stainless Steel	3000

Stainless Steel

Shadowclad Flashings Range

Flashing	Line Drawing	Description	Finish Available	Length (mm)
Horizontal 'Z'		Horizontal 'Z' flashing for horizontal joints between panels	Stainless Steel	3000
Inter-Storey 'Z'		Horizontal 'Z' flashing for horizontal joints between panels when limiting continuous cavities to a height of two storeys or 7 metres	Stainless Steel	3000