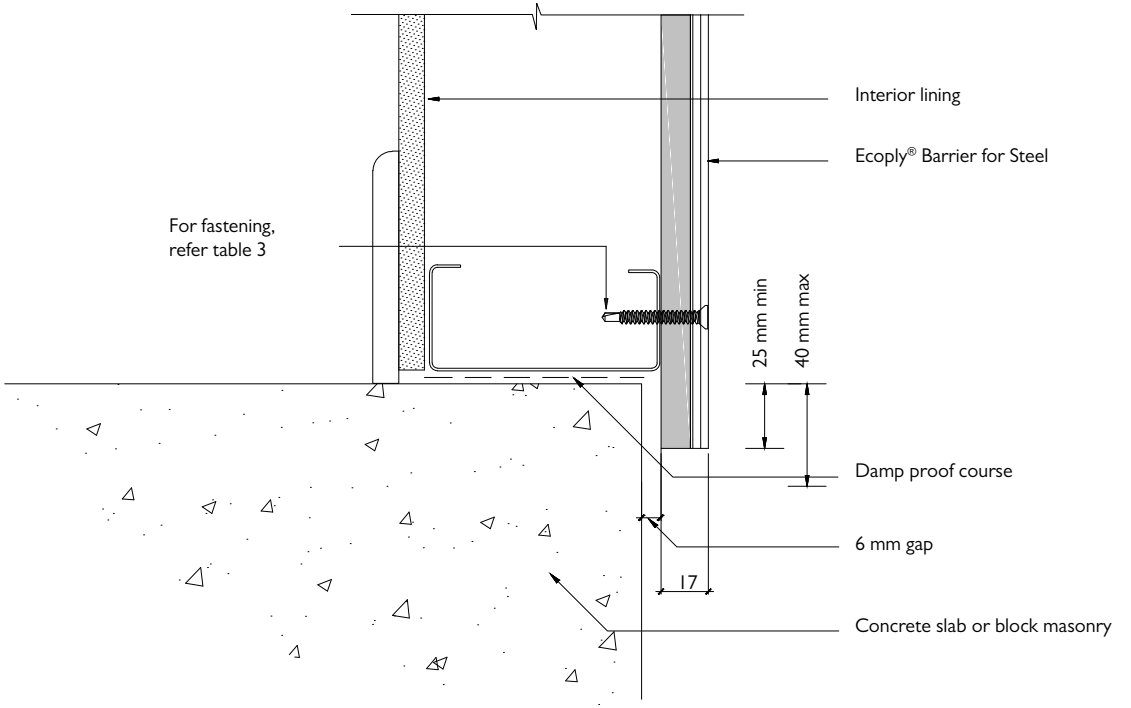
Interior lining
Ecoply® Barrier for Steel
For fastening,
refer table 3
25 mm min
40 mm max
Damp proof course
6 mm gap
17
Concrete slab or block masonry